


PRODUCT INFORMATION SHEET

NOVEMBER 2014

INEX>DECKING is a revolutionary, low carbon, high strength, yet lightweight, cement based decking board suitable for both residential and commercial applications (to be installed rough side up only).

INEX>DECKING has pencil round edges in long direction.

The rough side of **INEX>DECKING** provides a superb textured finish for multiple coating system applications.

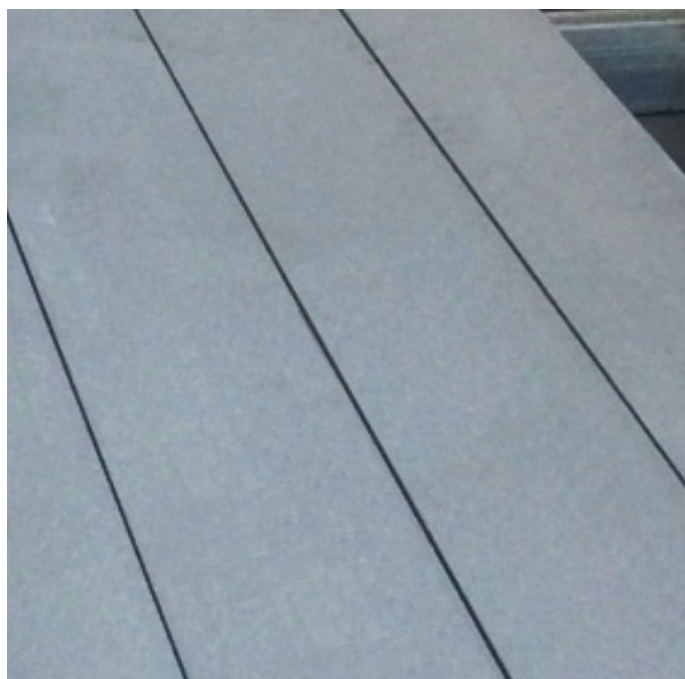

PRODUCT	LENGTH (mm)	WIDTH (mm)	THICKNESS (mm)	Kg/m ²	Kg/Length
INEX>DECKING	2700	140	19	24	9

WEIGHT

At approx. 9kg per 2700mm length **INEX>DECKING** is relatively light weight and easy to handle on site.

HIGH PERFORMANCE

INEX>DECKING can be cut and worked just like comparable fibre cement sheets, but offers improved bending strength characteristics and finish quality. **INEX>DECKING** spans over joists at 450mm centres.

NON-COMBUSTIBILITY

INEX>DECKING is non-combustible and is approved for bushfire BAL-FZ* construction in accordance with AS3958-2009.

*BAL-FZ (Flame Zone) is the highest Bushfire Attack Level where there is an extremely high risk of ember attack and burning debris ignited by windborne embers, and a likelihood of exposure to an extreme level of radiant heat and direct exposure to flames from the fire front. Details of BAL-FZ wall systems are available on request.

ACOUSTIC

INEX>DECKING's acoustic qualities offer enhanced impact sound damping.

MATERIAL

INEX>DECKING is an advanced high strength, low carbon fibre reinforced Engineered Cementitious Composite (ECC) product, containing 60% of post industrial recycled materials. It is toxin free and is 100% recyclable.

VALUE

INEX>DECKING is priced for value for the construction industry and competes strongly against all comparable products. Pricing is available on application to UBIQ or its distributors.



INEX>DECKING can be used for both residential and commercial applications.

WATER RESISTANCE

INEX>DECKING is water resistant.

DURABILITY

INEX>DECKING has long term durability and is dimensionally stable

LOW CARBON

INEX>DECKING is a low carbon product containing about 40% of the embodied energy of equivalent portland cement derived products.

SUPERIOR FINISH

The rough side of **INEX>DECKING** provides a superb textured surface for multiple coating system applications. Timber finishes can be easily applied (rough side only). Refer to COATINGS under SYSTEMS menu on UBIQ website for information regarding timber finishes.

ASBESTOS AND TOXIN FREE

INEX>DECKING does not contain any toxins and is asbestos free.

MOULD & TERMITE RESISTANCE

INEX>DECKING is resistant to mould and termite attack.

Refer to **INEX>DECKING** Technical Information Sheet for detailed information.